

LONCOIN II FLECKS

LONSEAL

The Loncoin series boasts a coin surface embossing that delivers a striking directional design — a decorative touch that provides style and enhanced traction. LONCOIN II FLECKS adds a dazzling fleck coloration that provides camouflage for easier maintenance.

STANDARD SIZES (nominal)

Overall thickness: 0.100" (2.5 mm)

Wear layer thickness: 0.031" (0.8 mm)

Roll size: 6': (1.8 m) wide x 60' (18.3 m)


8': (2.4 m) wide x 60' (18.3 m)

Weight: 6' 0.8 lbs./sq. ft., 290 lbs./roll

8': 0.8 lbs./sq. ft., 385 lbs./roll

Colors: 6': Seven available

8': Five available

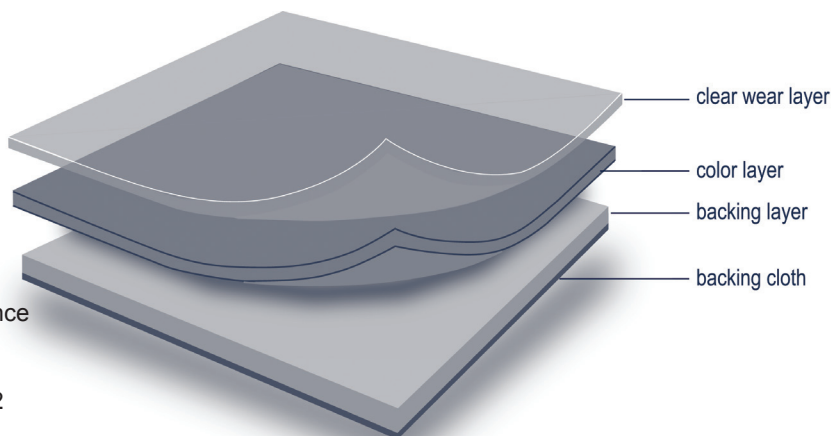

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20 - 40% post-industrial recycled content
 - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore® Indoor Air Quality Certified
 - Conforms to CA Specification 01350
- LEED Low Emitting Materials
 - Adhesives and Sealants: LEED IEQ Credit 4.1
 - Flooring Systems: LEED IEQ Credit 4.3

TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....Type 1, Grade1, Class B

Flexibility, ASTM F137.....Pass

Hardness, ASTM D2240.....85

James Machine, SCOF, ASTM D2047.....Neolite: 0.88; Neolite w/ Finish: 0.88

Abrasion Resistance, ASTM D3884.....0.60%, 1,000 cycles

Static Load (max 0.005"), ASTM F970.....800 psi

Short-term Indentation, ASTM F1914.....0.001" residual indentation @ 75 lbs

Castor Chair Test, ISO TR4918.....25,000 cycles - Wear: 4.8, Color: 5.0, Index: 4.9

Dimensional Stability, ASTM F2199.....0.16% loss

Heat Stability, ASTM F1514.....Pass

Light Stability, ASTM F1515.....Pass

Critical Radiant Flux, ASTM E648.....Class 1 ≥ 0.45 watts/cm²

Chemical Resistance, ASTM F925.....Slight Color Change: Gasoline

For detailed technical information, please refer to www.lonseal.com.



by **SCS** Certified.



LONSEAL, INC.
928 E. 238th Street, Carson, CA 90745 USA
800.832.7111 toll free | 310.830.7111 ph
www.lonseal.com



Updated: 01.27.16