

# LONPLATE I

# LONSEAL


LONPLATE I is the original steel-plate design adapted to resilient sheet vinyl. This floor surface provides a measure of skid-resistance without sacrificing color and style. The exclusive embossing and coloration provides excellent camouflage for scuffing and wear.

## STANDARD SIZES (nominal)

**Overall thickness:** 0.100" (2.5 mm)  
**Wear layer thickness:** 0.067" (1.7 mm)  
**Roll size:** 6' (1.8 m) wide x 60' (18.3 m)  
**Weight:** 0.8 lbs./sq. ft., 275 lbs./roll  
**Colors:** Nine available

## GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- FloorScore® Indoor Air Quality Certified
  - Conforms to CA Specification 01350
- LEED Low Emitting Materials
  - Adhesives and Sealants: LEED IEQ Credit 4.1
  - Flooring Systems: LEED IEQ Credit 4.3

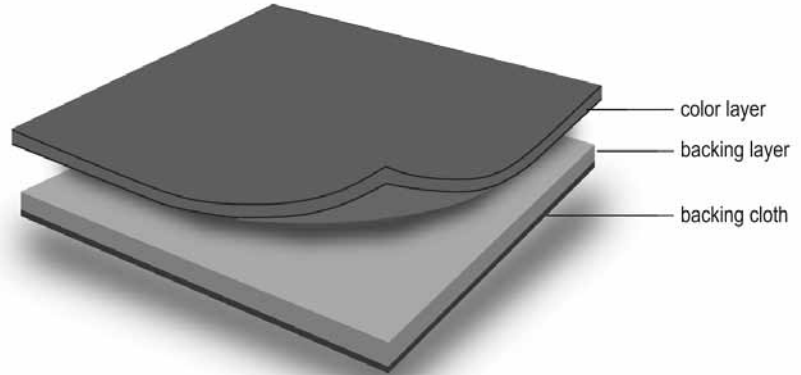

## 10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

## TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class B
Flexibility, ASTM F137.....	Pass
Hardness, ASTM D2240.....	85
James Machine, SCOF, ASTM D2047.....	Neolite: 0.74; Neolite w/ Finish: 0.75
Abrasion Resistance, ASTM D3884.....	1.00%, 1,000 cycles
Static Load (max 0.005"), ASTM F970.....	750 psi
Short-term Indentation, ASTM F1914.....	0.002" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918.....	25,000 cycles - Wear: 4.0, Color: 4.0, Change: 4.2
Dimensional Stability, ASTM F2199.....	0.34% loss
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Critical Radiant Flux, ASTM E648.....	Class 1 $\geq 0.45$ watts/cm <sup>2</sup>
Chemical Resistance, ASTM F925.....	Slight Color Change: 5% Sodium Hydroxide, 5% Hydrochloric Acid; Slight Surface Dulling: Gasoline

For detailed technical information, please refer to [www.lonseal.com](http://www.lonseal.com).



by **SCS** certified.



LONSEAL, INC.  
928 E. 238th Street, Carson, CA 90745 USA  
800.832.7111 toll free | 310.830.7111 ph  
[www.lonseal.com](http://www.lonseal.com)



Updated: 04.14.14