


LONPLATE PATINA

LONSEAL

LONPLATE PATINA is resilient sheet vinyl surface with high-tech metallic coloring and a classic “diamond plate” embossing. The exclusive “galvanized” coloration provides excellent camouflage for scuffing and wear — pairing the aesthetics of iron with ease of vinyl maintenance.

STANDARD SIZES (nominal)

Overall thickness: 0.100" (2.5 mm)
Wear layer thickness: 0.031" (0.8 mm)
Roll size: 6' (1.8 m) wide x 60' (18.3 m)
Weight: 0.8 lbs./sq. ft., 305 lbs./roll
Colors: Two available

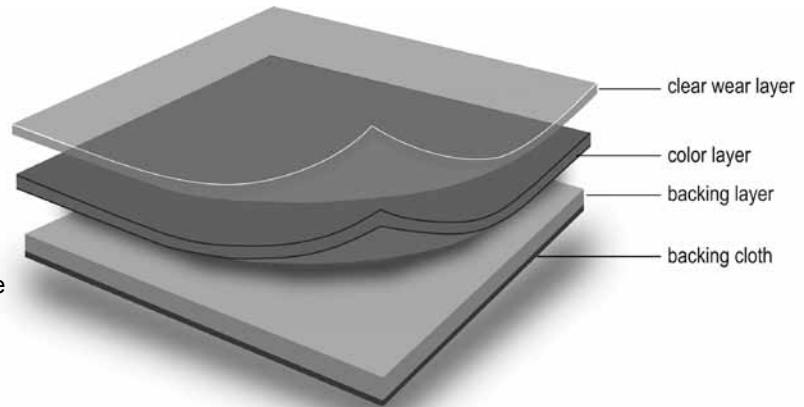

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20 - 40% post-industrial recycled content
 - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore® Indoor Air Quality Certified
 - Conforms to CA Specification 01350
- LEED Low Emitting Materials
 - Adhesives and Sealants: IEQ Credit 4.1
 - Flooring Systems: IEQ Credit 4.3

10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class B
Flexibility, ASTM F137.....	Pass
Hardness, ASTM D2240.....	90
James Machine, SCOF, ASTM D2047.....	Neolite: 0.74; Neolite w/ Finish: 0.75
Abrasion Resistance, ASTM D3884.....	0.62%, 1,000 cycles
Static Load (max 0.005"), ASTM F970.....	700 psi
Short-term Indentation, ASTM F1914.....	0.018" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918.....	25,000 cycles - Wear: 4.1, Color: 4.0, Change: 4.3
Dimensional Stability, ASTM F2199.....	0.23% loss
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Critical Radiant Flux, ASTM E648.....	Class 1 ≥ 0.45 watts/cm ²
Chemical Resistance, ASTM F925.....	Slight Color Change: Gasoline

For detailed technical information, please refer to www.lonseal.com.



LONSEAL, INC.
928 E. 238th Street, Carson, CA 90745 USA
800.832.7111 toll free | 310.830.7111 ph
www.lonseal.com



Updated: 04.14.14