


FEATURES (sizes shown are nominal)

Roll Width: 6 ft. (1.8 m)
Roll Length: 60 ft. (18.3 m)
Overall Thickness: 0.080 in. (2.0 mm)
Wear Layer Thickness: 0.020 in. (0.5 mm)
Weight: 0.7 lbs./sq. ft., 240 bs./roll

PROPERTIES

Per ASTM F1303: Type I, Grade I, Class B, Commercial Use
Topseal: 30 µm thick, factory-applied urethane finish
GreenMedic®: Antimicrobial resistance
GreenAir®: Low VOC technologies
FloorScore®: Indoor Air Quality (IAC) Certified;
 Comforms to CA Specification 01350

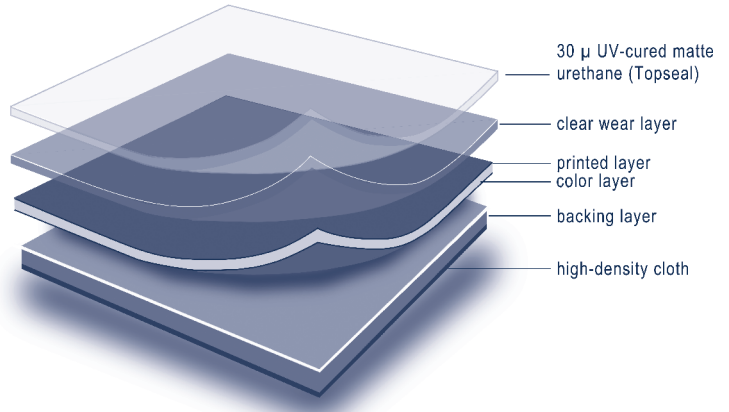

10-Year Limited Warranty

TEST DATA	
ASTM F1303 TESTING, SHEET VINYL FLOOR COVERING WITH BACKING	RESULT
ASTM F137, Flexibility [1/4" (6.4 mm) Mandrel]	Passes
ASTM F925, Chemical Resistance (No more than slight change)	Passes
ASTM F970, Static Load Limit (175 psi, max. 0.005 in.)	Passes
ASTM F1514, Stability to Heat (rE≤8)	Passes
ASTM F1515, Stability to Light (rE≤8)	Passes
ASTM F1914, Short-Term Indentation (50 lbs., 0.75 in. Ø, max. 0.012 in.)	Passes
ADDITIONAL TESTING	RESULT
ASTM D2047, Dry SCOF, James Machine	Leather: 0.67; Neolite: 0.97
ASTM D6962, Rolling Chair Test (25,000 Cycles)	Slight Change
ASTM E648, Critical Radiant Flux	Class 1 (≥ 0.45 watts/cm ²)
ASTM E662, Smoke Density	Passes (≤ 450 Dmc)
ASTM F510, Abrasion Resistance (1,000 Cycles, 1,000 g)	0.19 g (0.70%) Loss
ASTM F2753, Dynamic Rolling Load (Hill-Rom Gurney Wheel, 300 lbs., 500 cycles, Lonseal #650 adhesive)	Seam intact, slight gloss change, slight indentation

NOTE: Printed data may not be the most current. Refer to LONSEAL.COM for the most current technical information.

Celebrating over 45 years of durability and performance, **LONSEAL® FLOORING** offers a unique selection of resilient sheet vinyl in exterior and interior, embossed, smooth, sport and wood-grain surfaces. We provide finishes of exceptional beauty and utility which are as economical as they are exhilarating. Servicing a range of commercial applications including healthcare, education, fitness, corporate, retail and hospitality, Lonseal Flooring products are specifically chosen by architects and designers nationwide. In addition, we have our **LONSEAL® SPECIALTY** product line that have been designed to provide solutions that meet the demands of market-specific installations in the areas of aviation, marine, and military.

Lonseal® has the reputation for the highest quality sheet vinyl products. We are known to focus on essential attributes such as stain and slip-resistance, **GreenMedic®** anti-microbial formula that is exclusive to Lonseal, and having the lowest VOC properties of any vinyl flooring product in the market with our **GreenAir®** formulation.



JIS Q 9001:2004/JIS Q 9001:2000, the International Quality Assurance Standard
 ISO 14001, Environmental Management Systems

LONSEAL, INC.
 928 E. 238th Street, Carson, CA 90745 USA
 800.832.7111 toll free | 310.830.7111 ph
www.lonseal.com

Updated: 06.23.17