

LONSAFE is a closed cell foam underlayment to be used beneath Lonseal Sheet Vinyl Flooring for comfort underfoot. Lonsafe does not support moisture retention.

For interior use only, Lonsafe offers resilience underfoot, reduced impact noise, and increased shock absorbency.

STANDARD SIZES (nominal)

- Overall thickness:** 0.200" (5.0 mm)
- Roll size:** 71" (1.8 m) wide x 59' (18.0 m)
- Weight:** 0.3 lbs./sq. ft., 115 lbs./roll
- Colors:** One available

GREEN FEATURES


- LEED Low Emitting Materials
 - Adhesives and Sealants: IEQ Credit 4.1

10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

Limitations:

Heavy static loads can result in permanent indentation. This product is intended for areas with foot traffic only.

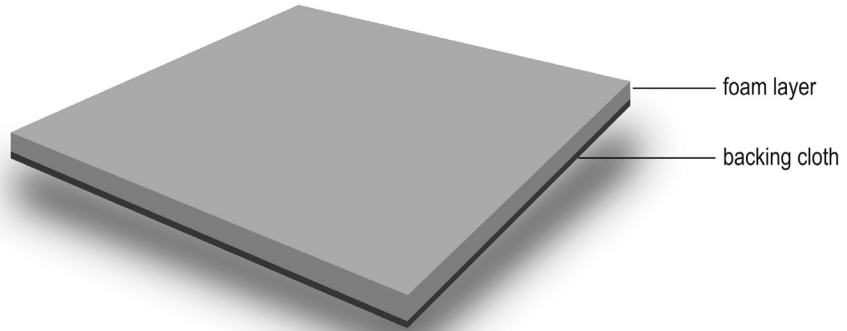

TECHNICAL DATA

Static Load (max 0.005") , ASTM F970.....	25 psi
Sound Absorption Coefficient , ASTM C423.....	0.11
Sound Transmission Class , ASTM E90/E413.....	54

For detailed technical information, please refer to www.lonseal.com.

LONSEAL, INC.
928 E. 238th Street, Carson, CA 90745 USA
800.832.7111 toll free | 310.830.7111 ph
www.lonseal.com



Updated: 04.24.14