


LONSTAGE MT is suitable for showrooms and "showplace" spaces. It is also a non-glare writing surface that is ideal for desks, counters, drawing boards, studio consoles, drafting tables and laboratory work surfaces. Recommended for interior use only, and should not be used where subject to extreme mechanical use.

STANDARD SIZES (nominal)

Overall thickness: 0.080" (2.0 mm)
Wear layer thickness: 0.014" (0.35 mm)
Roll size: 6' (1.8 m) wide x 60' (18.3 m)
Weight: 0.64 lbs./sq.ft., 230 lbs./roll
Colors: Two available

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- FloorScore® Indoor Air Quality Certified
 - Conforms to CA Specification 01350
- LEED Low Emitting Materials
 - Adhesives and Sealants: LEED IEQ Credit 4.1
 - Flooring Systems: LEED IEQ Credit 4.3

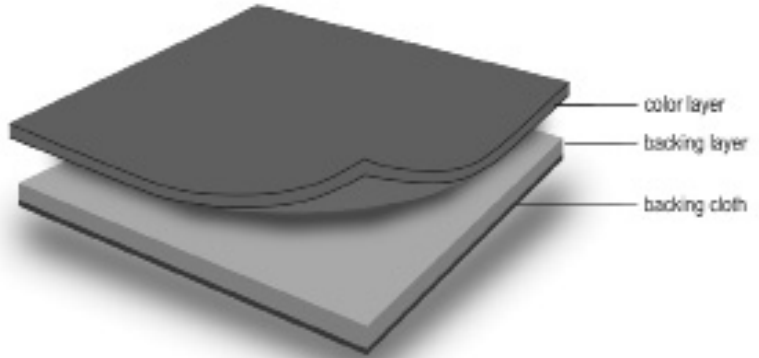

10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303	Type 1, Grade1, Class B
Flexibility, ASTM F137	Pass
Hardness, ASTM D2240	90
James Machine, SCOF, ASTM D2047	Neolite: 0.79 Neolite w/Finish: 0.81
Abrasion Resistance, ASTM D3884	0.81%, 1,000 cycles
Static Load (max 0.005"), ASTM F970	750 psi
Short-term Indentation, ASTM F1914	0.004" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918	25,000 cycles - Wear: 4.5 Color: 3.0 Index: 4.6
Dimensional Stability, ASTM F2199	0.07% loss
Heat Stability, ASTM F1514	Pass
Light Stability, ASTM F1515	Pass
Critical Radiant Flux, ASTM E648	Class 1 ≥ 0.45 watts/cm ²
Chemical Resistance, ASTM F925	Slight Color Change: 5% Phenol, Kerosene, Olive Oil; Moderate Color Change: Gasoline

For detailed technical information, please refer to www.lonsealspecialty.com.



by **SCS** Certified.



LONSEAL, INC.
 928 E. 238th Street, Carson, CA 90745 USA
 800.832.7111 toll free | 310.830.7111 ph
www.lonsealspecialty.com



Updated: 04.15.14