

LONSTAGE UV

LONSEAL

Chic and sophisticated, LONSTAGE UV offers a dramatic option that makes a bold and dramatic statement. From entertainment venues to temporary floors and stages, Lonstage UV combines a great design with the ultimate fashion statement.

STANDARD SIZES (nominal)


Overall thickness: 0.080" (2.0 mm)

Wear layer thickness: 0.018" (0.45 mm)

Roll size: 6' (1.83 m) wide x 60' (18.3 m)

Weight: 0.7 lbs./sq. ft., 245 lbs./roll

Colors: Four available

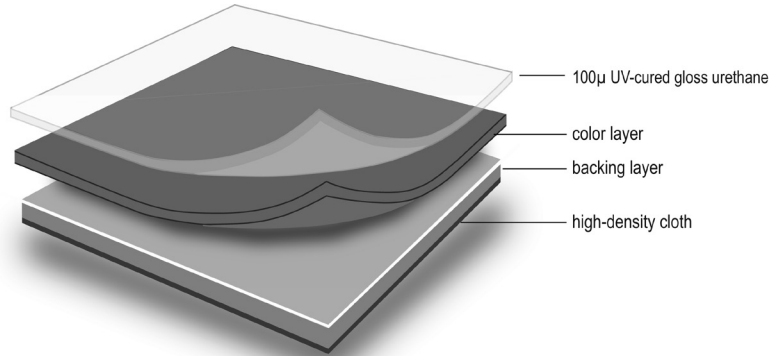

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20 - 35% post-industrial recycled content
 - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore® Indoor Air Quality Certified
 - Conforms to CA Specification 01350
- LEED Low Emitting Materials
 - Adhesives and Sealants: IEQ Credit 4.1
 - Flooring Systems: IEQ Credit 4.3

10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class B
Flexibility, ASTM F137.....	Pass
Hardness, ASTM D2240.....	95
James Machine, SCOF, ASTM D2047.....	Neolite: 0.64
Abrasion Resistance, ASTM D3884.....	0.54%, 1,000 cycles
Static Load (max 0.005"), ASTM F970.....	750 psi
Short-term Indentation, ASTM F1914.....	0.009" residual
Castor Chair Test, ISO TR4918.....	25,000 cycles - Wear: 5.0, Color: 5.0, Change: 5.0
Dimensional Stability, ASTM F2199.....	0.17%
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Critical Radiant Flux, ASTM E648.....	Class 1 ≥ 0.45 watts/cm ²
Chemical Resistance, ASTM F925.....	Moderate Surface Attack: 5% Phenol; Slight Color Change: 5% Phenol

For detailed installation information, please refer to Lonseal's Technical Manual for Interior Flooring Products at www.lonsealspecialty.com.



by  SCS certified.



LONSEAL, INC.
928 E. 238th Street, Carson, CA 90745 USA
800.832.7111 toll free | 310.830.7111 ph
www.lonsealspecialty.com



Updated: 11.04.13

JIS Q 9001:2004/JIS Q 9001:2000, the International Quality Assurance Standard
ISO 14001, Environmental Management Systems

LONSTAGE MT

LONSEAL


A chic and sophisticated matte look, LONSTAGE MT offers a dramatic option that makes a bold statement. From entertainment venues to temporary floors and stages, Lonstage MT combines a great design with the ultimate fashion statement.

STANDARD SIZES (nominal)

Overall thickness: 0.080" (2.0 mm)
Wear layer thickness: 0.014" (0.35 mm)
Roll size: 6' (1.83 m) wide x 60' (18.3 m)
Weight: 0.7 lbs./sq.ft., 245 lbs./roll
Colors: Two available

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- FloorScore® Indoor Air Quality Certified
 - Conforms to CA Specification 01350
- LEED Low Emitting Materials
 - Adhesives and Sealants: LEED IEQ Credit 4.1
 - Flooring Systems: LEED IEQ Credit 4.3

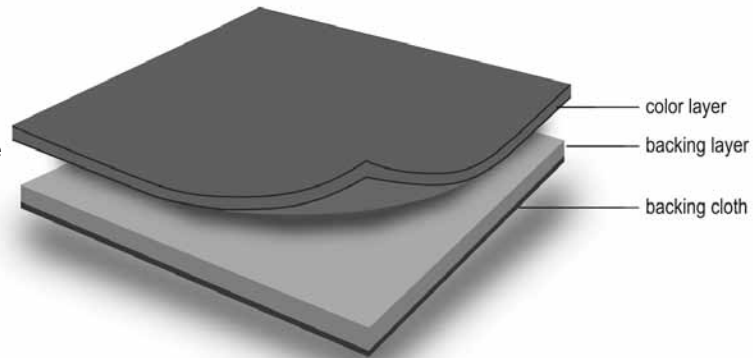

10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class B
Flexibility, ASTM F137.....	Pass
Hardness, ASTM D2240.....	90
James Machine, SCOF, ASTM D2047.....	Neolite: 0.79 Neolite w/Finish: 0.81
Abrasion Resistance, ASTM D3884.....	0.81%, 1,000 cycles
Static Load (max 0.005"), ASTM F970.....	750 psi
Short-term Indentation, ASTM F1914.....	0.004" residual
Castor Chair Test, ISO TR4918.....	25,000 cycles - Wear: 4.5 Color: 3.0 Index: 4.6
Dimensional Stability, ASTM F2199.....	0.07%
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Critical Radiant Flux, ASTM E648.....	Class 1 ≥ 0.45 watts/cm ²
Chemical Resistance, ASTM F925.....	Slight Color Change: 5% Phenol, Kerosene, Olive Oil; Moderate Color Change: Gasoline

For detailed installation information, please refer to Lonseal's Technical Manual for Interior Flooring Products at www.lonsealspecialty.com.



LONSEAL, INC.
928 E. 238th Street, Carson, CA 90745 USA
800.832.7111 toll free | 310.830.7111 ph
www.lonsealspecialty.com



Updated: 04.22.13