


Featuring exclusive GreenAir™ technology that significantly reduces VOC emission, LONECO® MESA provides an eco-friendly environment with superior indoor air quality and lower volatile organic emissions than other floors. The exclusive coloration provides excellent camouflage for scuffing and soil.

STANDARD SIZES (nominal)

Overall thickness: 0.100" (2.5 mm)
Wear layer thickness: 0.031" (0.8 mm)
Roll size: 6' (1.83 m) wide x 60' (18.3 m)
Weight: 0.8 lbs./sq. ft., 295 lbs./roll
Colors: One available

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20 - 50% post-industrial recycled content
 - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore® Indoor Air Quality Certified
 - Conforms to CA Specification 01350
- LEED Low Emitting Materials
 - Adhesives and Sealants: IEQ Credit 4.1
 - Flooring Systems: IEQ Credit 4.3

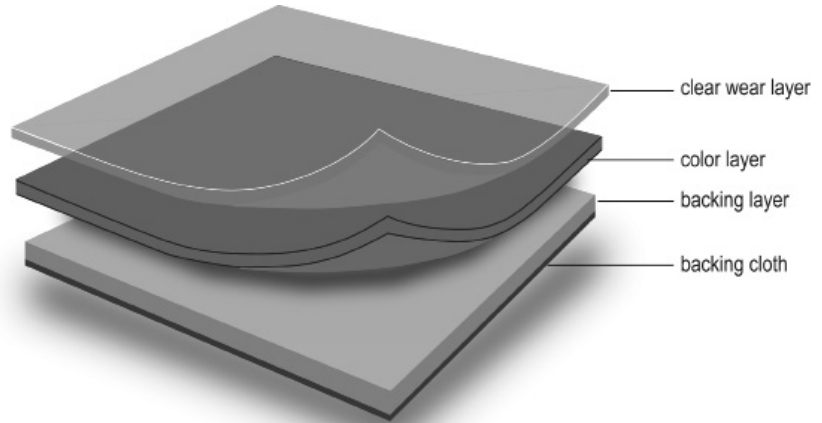

10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303	Type 1, Grade1, Class B
Flexibility, ASTM F137	Pass
Hardness, ASTM D2240	85
James Machine, SCOF, ASTM D2047	Neolite: 0.81, Neolite w/Finish: 0.85
Abrasion Resistance, ASTM D3884	0.1%, 1,000 cycles
Static Load (max 0.005") , ASTM F970.....	500 psi
Short-term Indentation, ASTM F1914	0.013" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918	25,000 cycles - Wear: 4.3, Color: 4.5, Change: 4.5
Dimensional Stability, ASTM F2199	0.32% loss
Heat Stability, ASTM F1514	Pass
Light Stability, ASTM F1515	Pass
Critical Radiant Flux, ASTM E648	Class 1 ≥0.45 watts/cm ²
Chemical Resistance, ASTM F925	No Change

For detailed installation information, please refer to Lonseal's Technical Manual for Interior Flooring Products at www.lonseal.com.



by **QSC** Certified.



LONSEAL, INC.
 928 E. 238th Street, Carson, CA 90745 USA
 800.832.7111 toll free | 310.830.7111 ph
www.lonseal.com



Updated: 06.24.15