

LONSEAL[®]

FLOORING

LONMETRO UV

Bold, Shiny and Unique

The urban flavor of LONMETRO UV fuses two colors with a UV-cured (urethane) protection layer that minimizes maintenance. Lonmetro UV shakes up the look of any space, but particularly those in retail, display and showrooms.

FEATURES *(data shown is nominal):*


- Roll Width: 6 ft. (1.8 m)
- Roll Length: 60 ft. (18.3 m)
- Overall Thickness: 0.080 in. (2.0 mm)
- Wear Layer Thickness: 0.031 in. (0.8 mm)
- Wear Layer Thickness for
668 Loading Zone only: 0.018 in (0.45 mm)
- Weight: 0.6 lbs./sq. ft., 210 lbs./rol


CERTIFIED:
FloorScore[®]

EXCLUSIVE LONSEAL[®] FORMULATIONS:
GreenAir[®] & GreenMedic[®]

LEEDv4 CONTRIBUTION Building & Construction Interiors:
Environmental Product Declarations Option 1
Sourcing of Raw Materials Option 2
Low-Emitting Materials
20%-35% Post-Industrial Recycled Content

** Due to the light color of #668 Loading Zone, more frequent maintenance procedures are necessary to ensure a long lasting installation. In addition, areas of prolonged UV exposure should be avoided to prevent unwanted discoloration of the flooring.*

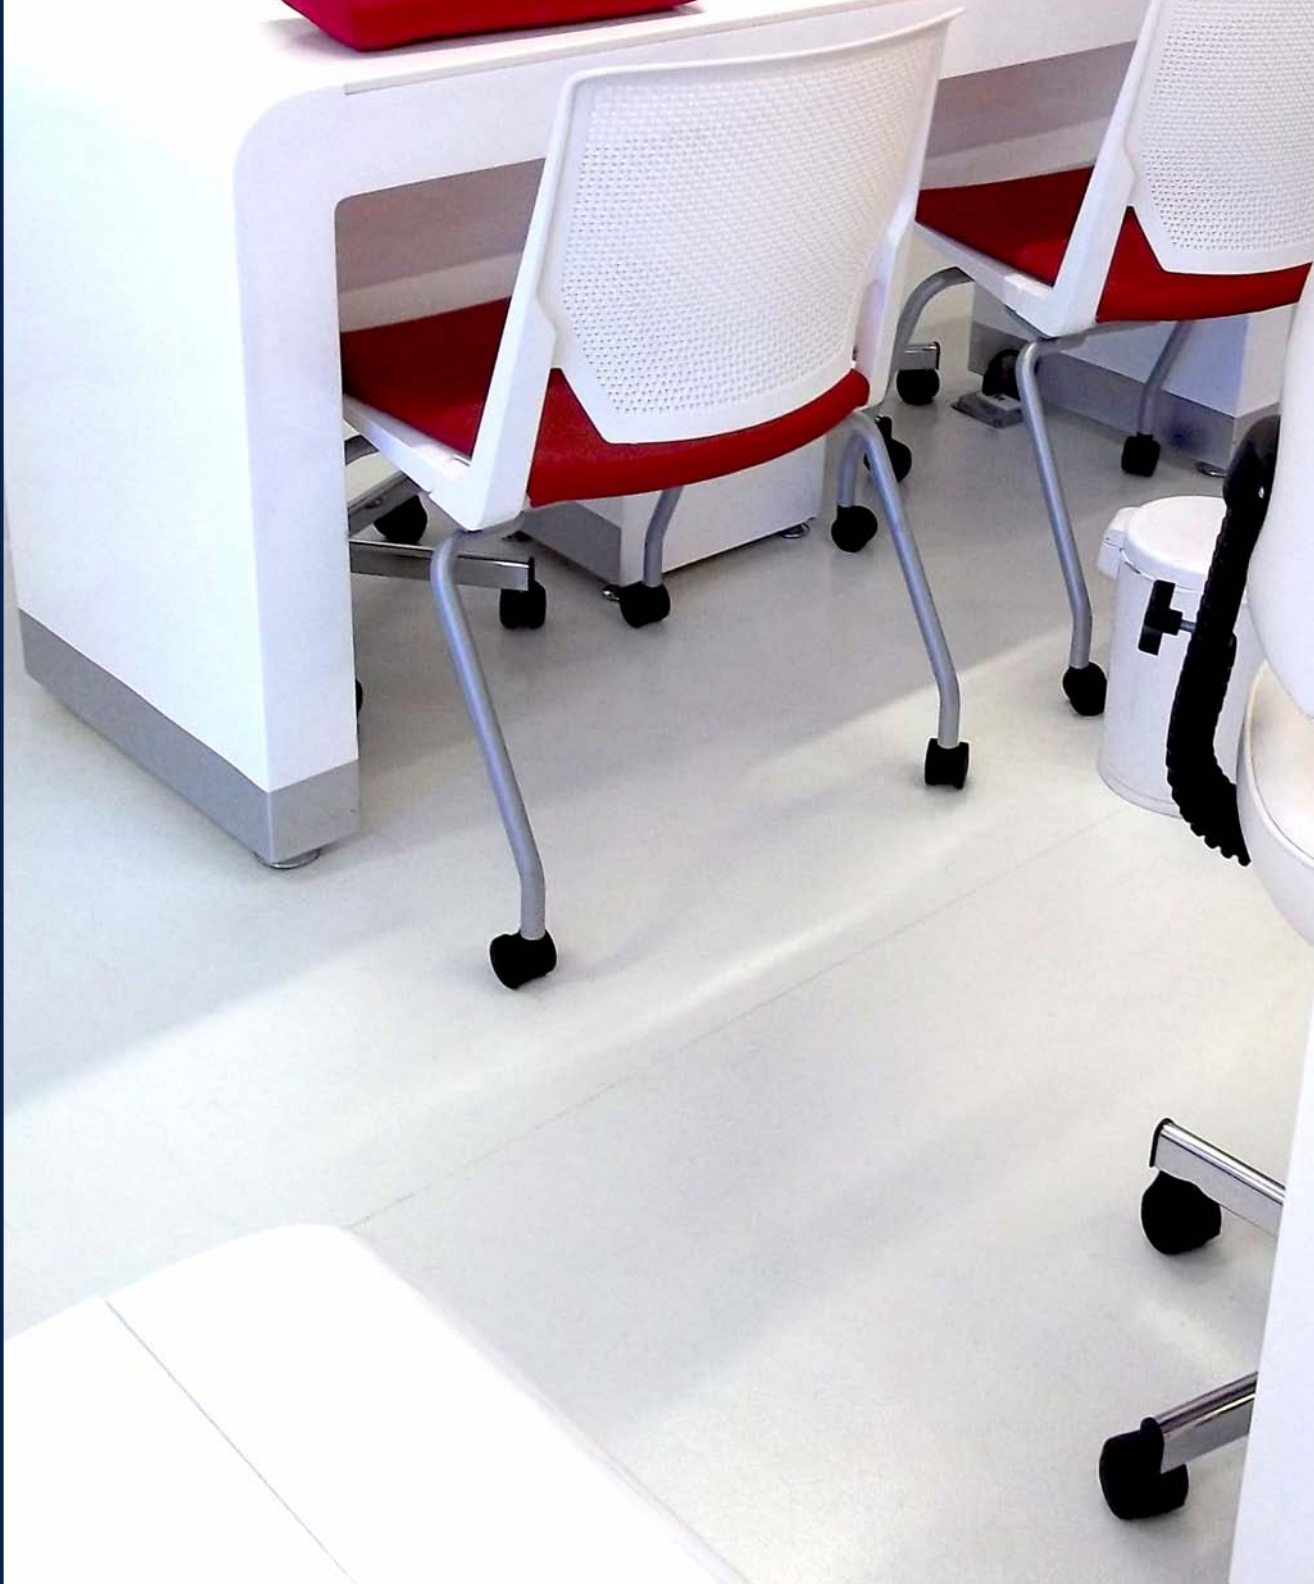

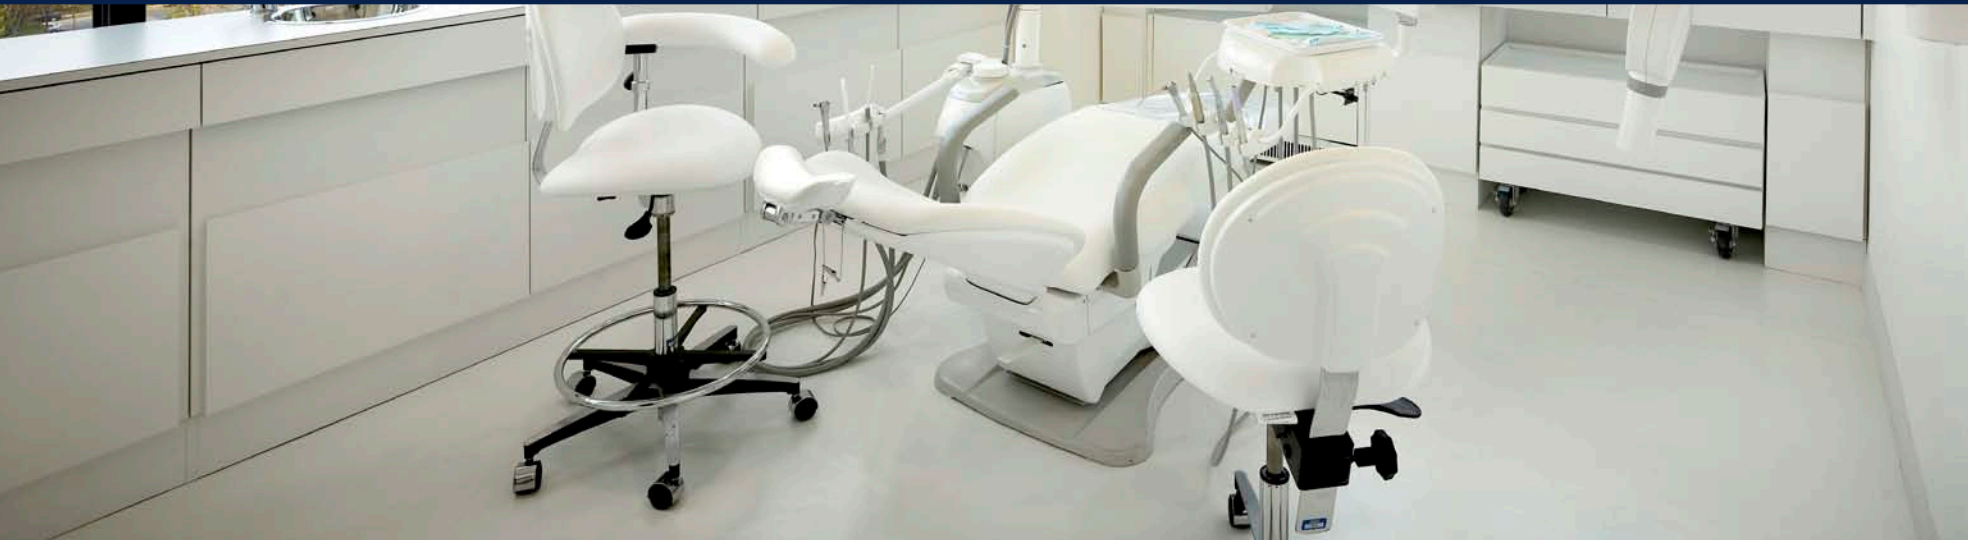

Product #: M660UV
Color # Name: 660 Fire Hydrant

Product #: M662UV
Color # Name: 662 Black Limo

Product #: M668UV
Color # Name: 668 Loading Zone*

