LONSEAL®

LONSPECK TOPSEAL

High Performance with a Timeless Design

The speckled surface of LONSPECK TOPSEAL easily hides grit and scuffing, while the sanitary seaming contributes to a hygienic environment. The nine therapeutic colors available make Lonspeck an exceptionally flexible option in commercial spaces, including healthcare, offices, education facilities and showrooms. Topseal is a factory-applied urethane finish that protects the floor, reduces scuffing and simplifies routine maintenance. Topseal is applied in a 30-micron wear layer and extends the life of the flooring by protecting it from wear due to staining, soiling and scuffing.

FEATURES (data shown is nominal): Roll Width: 6 ft. (1.8 m) Roll Length: 60 ft. (18.3 m) Overall Thickness: 0.080 in. (2.0 mm) Wear Layer Thickness: 0.028 in. (0.7 mm) Weight: 0.6 lbs./sq. ft., 225 lbs./roll


ASTM F1303 CLASSIFICATION: Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION Building & Construction Interiors: Environmental Product Declarations Option 1 Sourcing of Raw Materials Option 2 Low-Emitting Materials



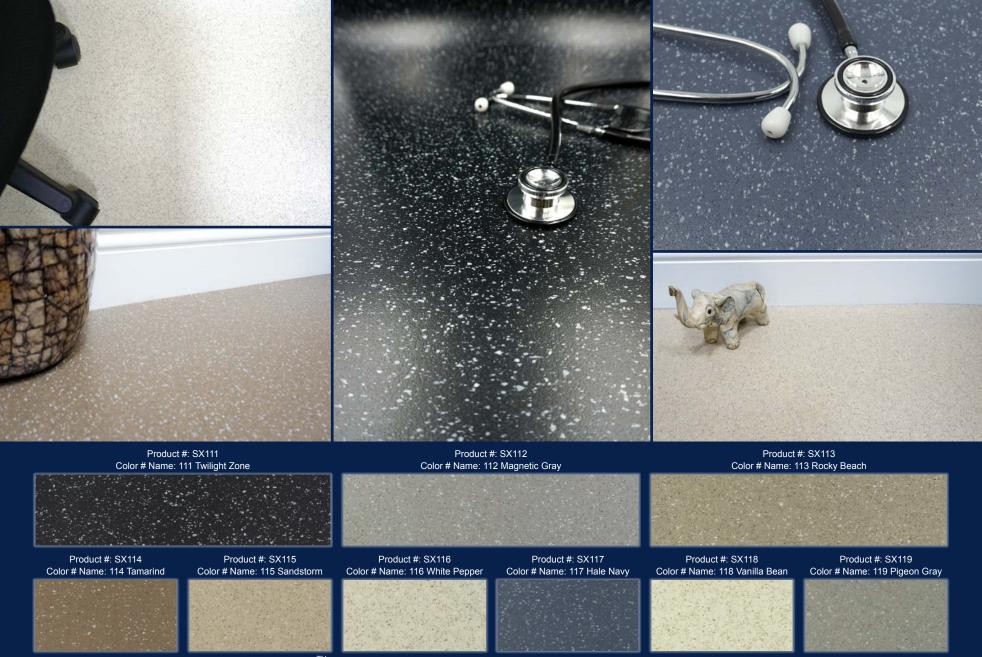

LONSEAL, INC.

928 E. 238[™] STREET, CARSON, CA, 90745

310.830.7111

WWW.LONSEAL.COM

Printing limitations may not represent the true color of the product. If color match is critical, please call us to request a sample. For the most up-to-date color choices, go to LONSEAL.COM.