


FEATURES (data shown are nominal)

- Roll Width:** 6 ft. (1.8 m)
- Roll Length:** 60 ft. (18.3 m)
- Overall Thickness:** 0.100 in. (2.5 mm)
- Wear Layer Thickness:** 0.031 in. (0.8 mm)
- Weight:** 0.8 lbs./sq. ft., 280 lbs./roll

PROPERTIES

- Per ASTM F1303:** Type I, Grade 1, Class B, Commercial Use
- GreenMedic®:** Antimicrobial resistance
- GreenAir®:** Low VOC technologies
- FloorScore®:** Indoor Air Quality (IAC) Certified;
Comforms to CA Specification 01350

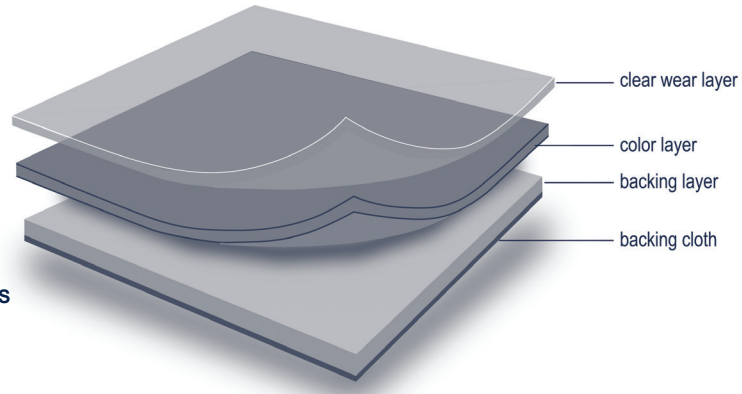

LEEDv4 CONTRIBUTION BUILDING & CONSTRUCTION INTERIORS

- Environmental Product Declarations Option 1
- Sourcing of Raw Materials Option 2
- Low-Emitting Materials
- 20%-40% Post-Industrial Recycled Content

Warranty periods vary by type of installation.

| TEST DATA | |
|---|---|
| ASTM F1303 TESTING, SHEET VINYL FLOOR COVERING WITH BACKING | RESULT |
| ASTM F137, Flexibility | Passes |
| ASTM F925, Chemical Resistance | Passes |
| ASTM F970, Static Load Limit | Passes |
| ASTM F1514, Stability to Heat | Passes |
| ASTM F1515, Stability to Light | Passes |
| ASTM F1914, Short-Term Indentation | Passes |
| ADDITIONAL TESTING | RESULT |
| ASTM D2047, Dry SCOF, James Machine, Floor Finish Applied | Neolite: 0.70 |
| ASTM D6962, Rolling Chair Test | No Change |
| ASTM E648, Critical Radiant Flux | Class 1 (≥ 0.45 watts/cm ²) |
| ASTM F510, Abrasion Resistance | 0.08 g (0.26%) Loss |

NOTE: Printed data may not be the most current. Refer to LONSEAL.COM for the most current technical information.

Celebrating over 46 years of durability and performance, **LONSEAL® FLOORING** offers a unique selection of resilient sheet vinyl in exterior and interior, embossed, smooth, sport and wood-grain surfaces. We provide finishes of exceptional beauty and utility which are as economical as they are exhilarating. Servicing a range of commercial applications including healthcare, education, fitness, corporate, retail and hospitality, Lonseal Flooring products are specifically chosen by architects and designers nationwide. In addition, we have our **LONSEAL® SPECIALTY** product line that have been designed to provide solutions that meet the demands of market-specific installations in the areas of aviation, marine, and specialty vehicles.

Lonseal® has the reputation for the highest quality sheet vinyl products. We are known to focus on essential attributes such as stain and slip-resistance, **GreenMedic®** anti-microbial formula that is exclusive to Lonseal, and having the lowest VOC properties of any vinyl flooring product in the market with our **GreenAir®** formulation.



Manufactured at a facility certified to:
 JIS Q 9001:2004/JIS Q 9001:2000, the International Quality Assurance Standard
 ISO 14001, Environmental Management Systems
 Version: 01.12.18

LONSEAL, INC.
 928 E. 238th Street, Carson, CA 90745 USA
 800.832.7111 toll free | 310.830.7111 ph
 www.lonseal.com