## LONSEAL® FLOORING

## **LONWOOD® NATURAL Topseal**

Subtle, Gentle Pattern Repeat and Unique Colors

LONWOOD NATURAL pairs the timeless aesthetics of wood with the benefits of high-performance sheet vinyl in colors that range from earthy to guirky. Its soft grain patterning and smooth surface make Lonwood Natural ideal for those who want the warmth of wood with easier maintenance. Lonwood Natural now comes standard with Lonseal's exclusive Topseal formulation. Topseal is a factory-applied urethane finish that protects the floor, reduces scuffing and simplifies routine maintenance. Topseal is applied in a 30-micron wear layer and extends the life of the flooring by protecting it from wear due to staining, soiling and scuffing.

FEATURES (data shown is nominal): Roll Width: 6 ft. (1.8 m) Roll Length: 60 ft. (18.3 m) Overall Thickness: 0.080 in. (2.0 mm) Wear Layer Thickness: 0.020 in. (0.5 mm) Weight: 0.6 lbs./sq. ft. (3.1 kg/m<sup>2</sup>)

ASTM F1303 CLASSIFICATION: Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

**EXCLUSIVE LONSEAL FORMULATIONS:** GreenAir® & GreenMedic®


LEEDv4/4.1 CONTRIBUTION B & C Interiors:

**Environmental Product Declarations Option 1** Sourcing of Raw Materials Option 2 Low-Emitting Materials Pre-Consumer (Post-Industrial) Recycled Content

▲ WARNING: Cancer and Reproductive Harmwww.P65Warnings.ca.gov

vJulv2019



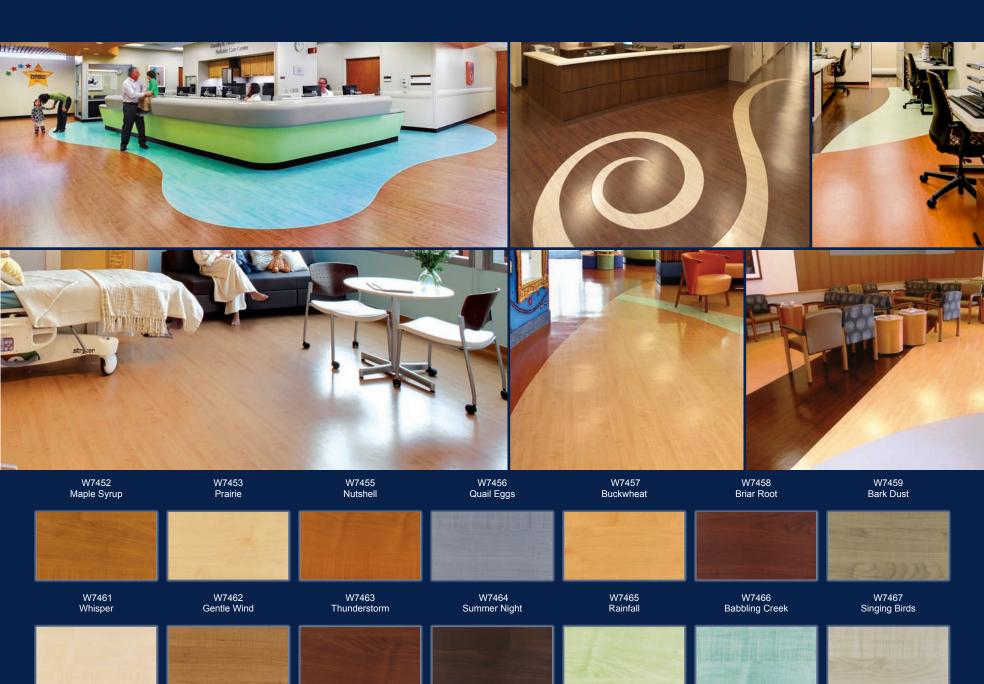

928 E. 238<sup>TH</sup> STREET, CARSON, CA, 90745

LONSEAL, INC.

310.830.7111

WWW.LONSEAL.COM