
LONSEAL®

MARINE FLOORING

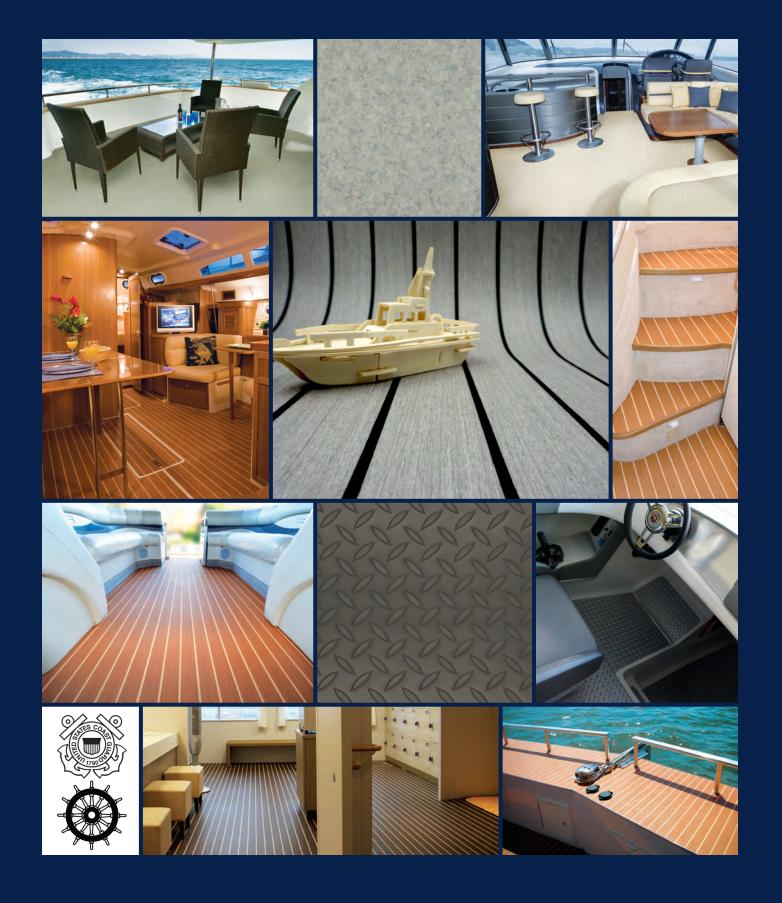

LONMARINE® WOOD

LONMARINE® WOOD is Lonseal's high-performance, slip-resistant marine safety flooring that has been specifically manufactured to comply with IMO/MED specifications for international markets and is USCG approved.

FEATURES (data shown is nominal): Roll Width: 6 ft. (1.8 m) Roll Length: 60 ft. (18.3 m) Overall Thickness: 0.080 in. (2.0 mm) Wear Layer Thickness: 0.020 in. (0.5 mm) Weight: 0.7 lbs./sq. ft. (3.4 kg/m²)

EU REACH COMPLIANT FORMULATION: Phthalate free, SVHC free

MEETS FMVS 302: Flammability of Interior Materials







Solid Teak



MW370

Teak & Holly





MW373 Mahogany & Holly Maple & Teak



MW375

Teak & Ebony

Mahogany







MW377 MW378 MW379 MW380 Walnut & Holly Teak & Ivory Antique & Ivory Weathered Teak & Ebony





LONMARINE® STONE

LONMARINE® STONE consists of a lightly dappled palette of neutral and gray tones that makes it a perfect fit for the interior spaces of both pleasure boats and hard-working industrial craft. The elegant marbleized pattern helps mask routine scuffing that can occur with heavy foot traffic.

FEATURES (data shown is nominal): Roll Width: 6 ft. (1.8 m)

Roll Length: 60 ft. (18.3 m) Overall Thickness: 0.080 in. (2.0 mm) Wear Layer Thickness: 0.020 in. (0.5 mm) Weight: 0.7 lbs./sq. ft. (3.3 kg/m²)

EU REACH COMPLIANT FORMULATION:

Phthalate free, SVHC free MEETS FMVS 302:

Flammability of Interior Materials





Dorato













Russo

MS14 Noce Carbone

LONCOMMODORE®

Offering the rugged endurance of classic steel plating, LONCOMMODORE® is Lonseal's toughest and most durable resilient, skid-resistant sheet vinyl flooring. Perfect for heavy-duty applications in all kinds of nautical spaces.

FEATURES (data shown is nominal): Roll Width: 6 ft. (1.8 m) Roll Length: 60 ft. (18.3 m)

Overall Thickness: 0.140 in. (3.5 mm) Wear Layer Thickness: 0.060 in. (1.5 mm) Weight: 0.8 lbs./sq. ft. (3.9 kg/m²)

EU REACH COMPLIANT FORMULATION: Phthalate free, SVHC free



Poinsettia





Oil Rubbed Bronze





CM604 CM605 Black Kettle Dress Blues







LONWOOD® MARINE

LONWOOD® MARINE (not MED/USCG certified) is Lonseal's high-performance, slip-resistant marine safety flooring in teak and holly. Intended for interior spaces, Lonwood Marine comes in both a glossy surface option or with Lonseal's factory-applied low gloss, urethane finish, Topseal.

FEATURES (data shown is nominal):
Roll Width: 6 ft. (1.8 m)
Roll Length: 60 ft. (18.3 m)

Overall Thickness: 0.080 in. (2.0 mm) Wear Layer Thickness: 0.02 in. (0.5 mm) Weight: 0.6 lbs./sq. ft. (3.1 kg/m²)







W72G Teak & Holly Gloss

W74TS Teak & Holly Topseal

LONMARINE® TRIMS

6 ft. long and pre-drilled every 5" (not MED/USCG certified)













All technical Information, including installation manuals, specifications, warranties and maintenance guidelines can be found at LONSEAL.com

▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

For complimentary samples, please call 800.832.7111.

Outside the U.S., call +1 310.830.7111

See the full collection of marine flooring products at LONSEAL.COM

Lonseal, Inc. 928 East 238th Street Carson, CA 90745 USA





