## LONSEAL® FLOORING

## **LONZEBRA Topseal**

Stunning, Exotic, & Unique

LONZEBRA TOPSEAL's striated, linear pattern is not only visually extraordinary, it also serves to mask dirt and other blemishes. The exotic colors and patterning are striking on their own and also have exciting pairing potential with Lonseal's Loneco®, Lonwood Natural and Lonwood Dakota products. The Lonzebra comes standard with Lonseal's exclusive Topseal formulation, a factory-applied urethane finish that protects the floor, reduces scuffing and simplifies routine maintenance.


FEATURES (data shown is nominal):
Roll Width: 6 ft. (1.8 m)
Roll Length: 60 ft. (18.3 m)
Overall Thickness: 0.080 in. (2.0 mm)
Wear Layer Thickness: 0.020 in. (0.5 mm)
Weight: 0.6 lbs./sq. ft. (3.0 kg/m²)


ASTM F1303 CLASSIFICATION:
Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: Topseal, GreenAir® & GreenMedic®

LEEDv4/4.1 CONTRIBUTION B & C Interiors: Environmental Product Declarations Option 1 Sourcing of Raw Materials Option 2 Low-Emitting Materials Pre-Consumer (Post-Industrial) Recycled Content

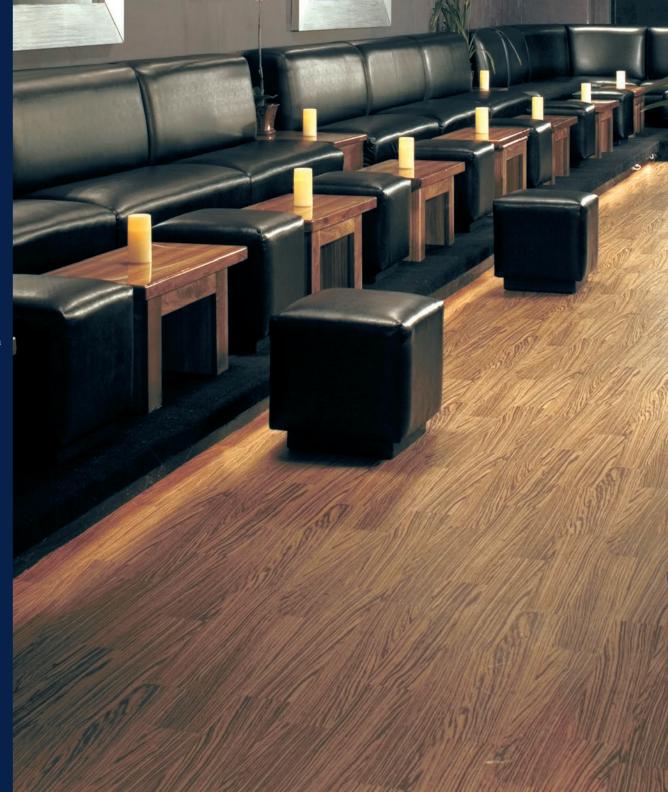

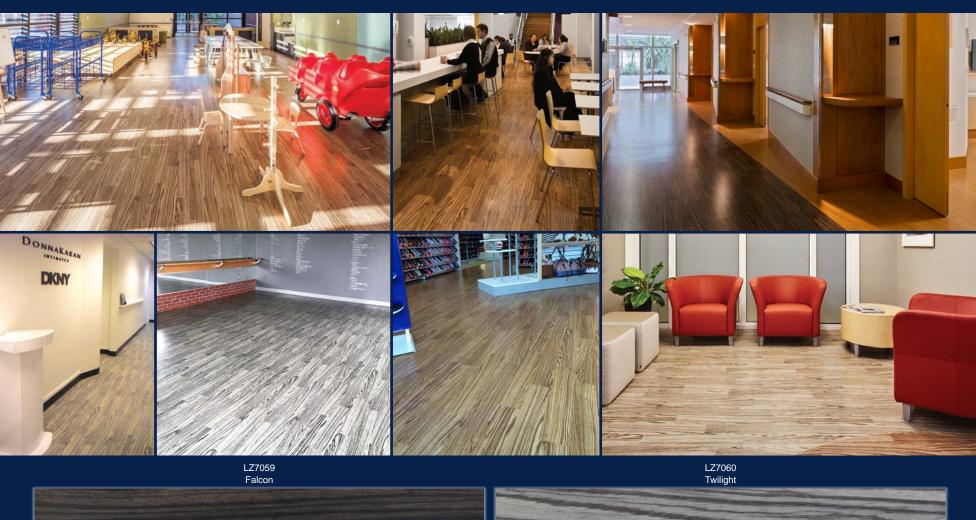



Printing limitations may not represent the true color of the product. If color match is critical, please call us to request a sample. For the most up-to-date color choices, go to LONSEAL.COM.