


**DESCRIPTION** (all sizes and weights are nominal)

<b>Part Number:</b>	SKFxxxxD72	<b>Color Numbers (xxxx):</b>	9001 Steel Glint
<b>Thickness:</b>	0.080 in. (2.0 mm)		9002 Iron Veil
<b>Width:</b>	72 in. (1.8 m)		9003 Bronze Ember
<b>Length:</b>	60 ft. (18.3 m)		9004 Champagne Alloy
<b>Weight:</b>	74 oz./sq. yd. (2509 g/m <sup>2</sup> )		

**PROPERTIES**

- ▶ Meets 14 CFR §25.793 [per AC 25-17A §162(b) and MIL-W-5044C]
- ▶ Meets 14 CFR §25.853(a), Appendix F, Part I(a)(ii)
- ▶ Meets FMVSS 302 (per 49 CFR §571.302)
- ▶ Phthalate free (REACH compliant, SVHC free)
- ▶ Topseal: factory-applied urethane finish
- ▶ Features GreenAir® (low VOC) and GreenMedic® (protects the flooring from degradation) formulations

**STRUCTURE** (all measurements are nominal; not to scale)

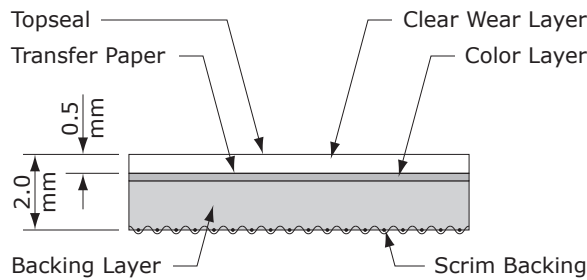

Note: For pattern information, please refer to the **Wood Grain Patterns Installation Guide**.

**TEST DATA** (refer to the last page for additional test information)

Abrasion Resistance		Result		
ASTM F510: 1,000 cycles		0.04 g (0.19%) loss		
Chemical Resistance (each reagent tested individually)		Result		
		ISO 26987: 5 min.	ASTM F925: 24 hr.	
<ul style="list-style-type: none"> <li style="width: 50%;">• Ammonia (5% NH<sub>4</sub>OH)</li> <li style="width: 50%;">• Hydraulic Fluid</li> <li style="width: 50%;">• Bleach (5.25% NaOCl)</li> <li style="width: 50%;">• Jet Fuel</li> <li style="width: 50%;">• Brake Fluid</li> <li style="width: 50%;">• Ketchup</li> <li style="width: 50%;">• Celeste Sani-Pak (two 8 g sachets per 5 gal. water)</li> <li style="width: 50%;">• Motor Oil</li> <li style="width: 50%;">• Citric Acid (10% solution)</li> <li style="width: 50%;">• Red Wine</li> <li style="width: 50%;">• Coffee</li> <li style="width: 50%;">• Skydrol</li> <li style="width: 50%;">• De-Icing Fluid</li> <li style="width: 50%;">• SkyKem Toilet Deodorant (liquid version)</li> <li style="width: 50%;">• Hand Sanitizer</li> <li style="width: 50%;">• Urea (20% solution)</li> </ul>		No Change		No Change
• Mustard		Moderate Change		Moderate Change
Static Coefficient of Friction		Result		
ASTM D2047: Floor Finish Applied		Leather: 0.66; Neolite: 0.85		
Dimensional Stability and Curling		Result		
		Machine Direction	Cross Direction	Curling
ISO 23999: 80 °C (176 °F) for 6 hrs.		-2.17 mm (-0.71%)	-0.14 mm (-0.05%)	1.80 mm
ISO 23999: 0 °C (32 °F) for 6 hrs.		-1.26 mm (-0.41%)	-0.37 mm (-0.12%)	7.20 mm
Indentation Resistance		Result		
ISO 24343-1, Residual Indentation		0.10 mm		
ISO 24343-2, Short-Term Indentation		0.08 mm		

**⚠ WARNING:** Cancer and Reproductive Harm – [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).