

LONSEAL[®]

FLOORING

LONSTAGE UV

Striking and Bold

LONSTAGE UV has the same bold and slick look as our Lonmetro but a smoother surface. Its ultra-clean style means that Lonstage UV is suitable for showrooms and “showplace” spaces. Recommended for interior use only, and should not be used where subject to extreme mechanical use. Ideal for stages, entertainment and dance studios.

FEATURES *(data shown is nominal):*

- Roll Width: 6 ft. (1.8 m)
- Roll Length: 60 ft. (18.3 m)
- Overall Thickness: 0.080 in. (2.0 mm)
- Wear Layer Thickness: 0.018 in. (0.45 mm)
- Weight: 0.7 lbs./sq. ft., 245 lbs./roll

ASTM F1303 CLASSIFICATION:

Type I, Grade 1, Class B, Commercial Use

CERTIFIED:

FloorScore[®]

EXCLUSIVE LONSEAL[®] FORMULATIONS:

GreenAir[®] & GreenMedic[®]

LEEDv4 CONTRIBUTION Building & Construction Interiors:

- Environmental Product Declarations Option 1
- Sourcing of Raw Materials Option 2
- Low-Emitting Materials
- 20% - 35% Post-Industrial Recycled Content

** Due to the light color of #100 Shiny White, more frequent maintenance procedures are necessary to ensure a long lasting installation. In addition, areas of prolonged UV exposure should be avoided to prevent unwanted discoloration of the flooring.*






Product #: S100
Color # Name: 100 Shiny White*





Product #: S102
Color # Name: 102 Shiny Black

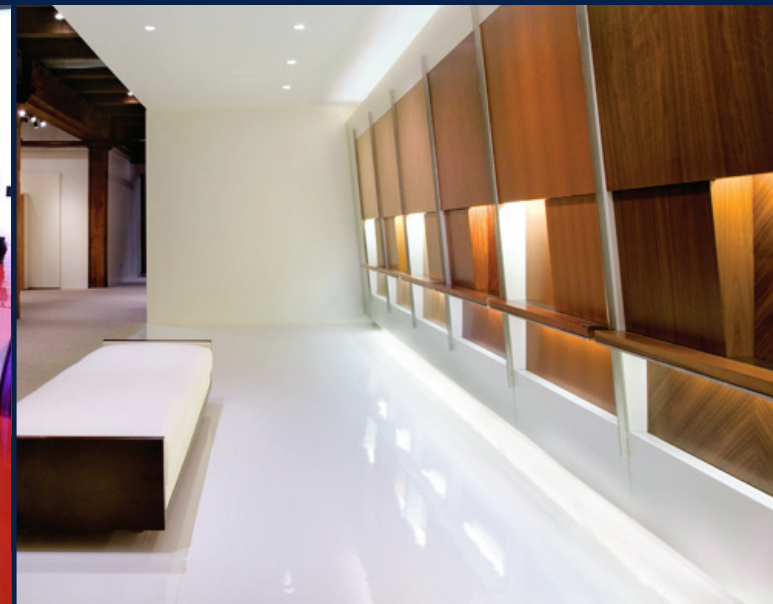

Product #: S104
Color # Name: 104 Shiny Blue



Product #: S105
Color # Name: 105 Shiny REd

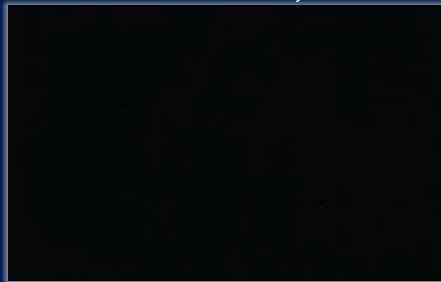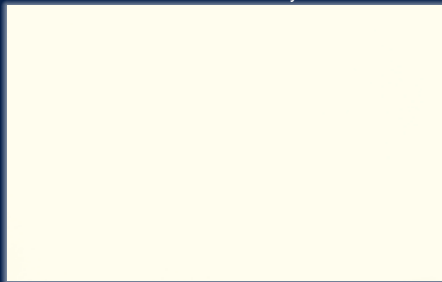

LONSEAL, INC.

928 E. 238TH STREET, CARSON, CA, 90745

310.830.7111

WWW.LONSEAL.COM

Printing limitations may not represent the true color of the product. If color match is critical, please call us to request a sample. For the most up-to-date color choices, go to LONSEAL.COM.