


FEATURES (data shown are nominal)

Roll Width:	6 ft. (1.8 m)
Roll Length:	60 ft. (18.3 m)
Overall Thickness:	0.100 in. (2.5 mm)
Wear Layer Thickness:	0.035 in. (0.9 mm)
Weight:	0.8 lbs./sq. ft., 275 lbs./roll

PROPERTIES

Per ASTM F1303:	Type I, Grade 1, Class B, Commercial Use
GreenMedic®:	Antimicrobial resistance
GreenAir®:	Low VOC technologies
FloorScore®:	Indoor Air Quality (IAC) Certified; Conforms to CA Specification 01350

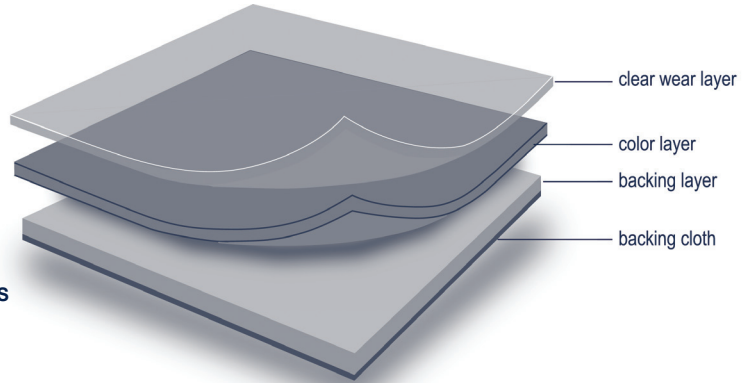

LEEDv4 CONTRIBUTION BUILDING & CONSTRUCTION INTERIORS

Environmental Product Declarations Option 1
Sourcing of Raw Materials Option 2
Low-Emitting Materials
20%-40% Post-Industrial Recycled Content

Warranty periods vary by type of installation.

* Due to the lightness in color #301 Opal, Lonseal highly recommends the use of six coats of finish. More frequent maintenance procedures are necessary to ensure a long lasting installation. In addition, areas of prolonged UV exposure should be avoided to prevent unwanted discoloration of the flooring.

TEST DATA	
ASTM F1303 TESTING, SHEET VINYL FLOOR COVERING WITH BACKING	RESULT
ASTM F137, Flexibility	Passes
ASTM F925, Chemical Resistance	Passes
ASTM F970, Static Load Limit	Passes
ASTM F1514, Stability to Heat	Passes
ASTM F1515, Stability to Light	Passes
ASTM F1914, Short-Term Indentation	Passes
ADDITIONAL TESTING	RESULT
ASTM D2047, Dry SCOF, James Machine, Floor Finish Applied	Neolite: 0.68
ASTM D6962, Rolling Chair Test	No Change
ASTM E648, Critical Radiant Flux	Class 1 (≥ 0.45 watts/cm ²)
ASTM F510, Abrasion Resistance	0.18 g (0.58%) Loss

NOTE: Printed data may not be the most current. Refer to LONSEAL.COM for the most current technical information.

Celebrating over 46 years of durability and performance, **LONSEAL® FLOORING** offers a unique selection of resilient sheet vinyl in exterior and interior, embossed, smooth, sport and wood-grain surfaces. We provide finishes of exceptional beauty and utility which are as economical as they are exhilarating. Servicing a range of commercial applications including healthcare, education, fitness, corporate, retail and hospitality, Lonseal Flooring products are specifically chosen by architects and designers nationwide. In addition, we have our **LONSEAL® SPECIALTY** product line that have been designed to provide solutions that meet the demands of market-specific installations in the areas of aviation, marine, and specialty vehicles.

Lonseal® has the reputation for the highest quality sheet vinyl products. We are known to focus on essential attributes such as stain and slip-resistance, **GreenMedic®** anti-microbial formula that is exclusive to Lonseal, and having the lowest VOC properties of any vinyl flooring product in the market with our **GreenAir®** formulation.



Manufactured at a facility certified to:

JIS Q 9001:2004/JIS Q 9001:2000, the International Quality Assurance Standard
ISO 14001, Environmental Management Systems
Version: 04.11.18

LONSEAL, INC.
928 E. 238th Street, Carson, CA 90745 USA
800.832.7111 toll free | 310.830.7111 ph
www.lonseal.com