

LONSEAL[®]

FLOORING

LONMETRO[®] UV

Bold, Shiny and Unique

The urban flavor of LONMETRO UV fuses two colors with a UV-cured (urethane) protection layer that minimizes maintenance. Lonmetro UV shakes up the look of any space, but particularly those in retail, display and showrooms.

FEATURES *(data shown is nominal):*

Roll Width: 6 ft. (1.8 m)

Roll Length: 60 ft. (18.3 m)

Overall Thickness: 0.080 in. (2.0 mm)

Wear Layer Thickness: 0.032 in. (0.8 mm)

Wear Layer Thickness for

668 Loading Zone only: 0.018 in (0.45 mm)

Weight: 0.6 lbs./sq. ft. (2.8 kg/m²)

CERTIFIED:

FloorScore[®]

EXCLUSIVE LONSEAL FORMULATIONS:

GreenAir[®] & GreenMedic[®]

LEEDv4/4.1 CONTRIBUTION B & C Interiors:

Environmental Product Declarations Option 1


Sourcing of Raw Materials Option 2


Low-Emitting Materials

Pre-Consumer (Post-Industrial) Recycled Content

** Due to the light color of #M668UV Loading Zone, more frequent maintenance procedures are necessary to ensure a long lasting installation. In addition, areas of prolonged UV exposure should be avoided to prevent unwanted discoloration of the flooring.*

⚠ WARNING: Cancer and Reproductive Harm-
www.P65Warnings.ca.gov

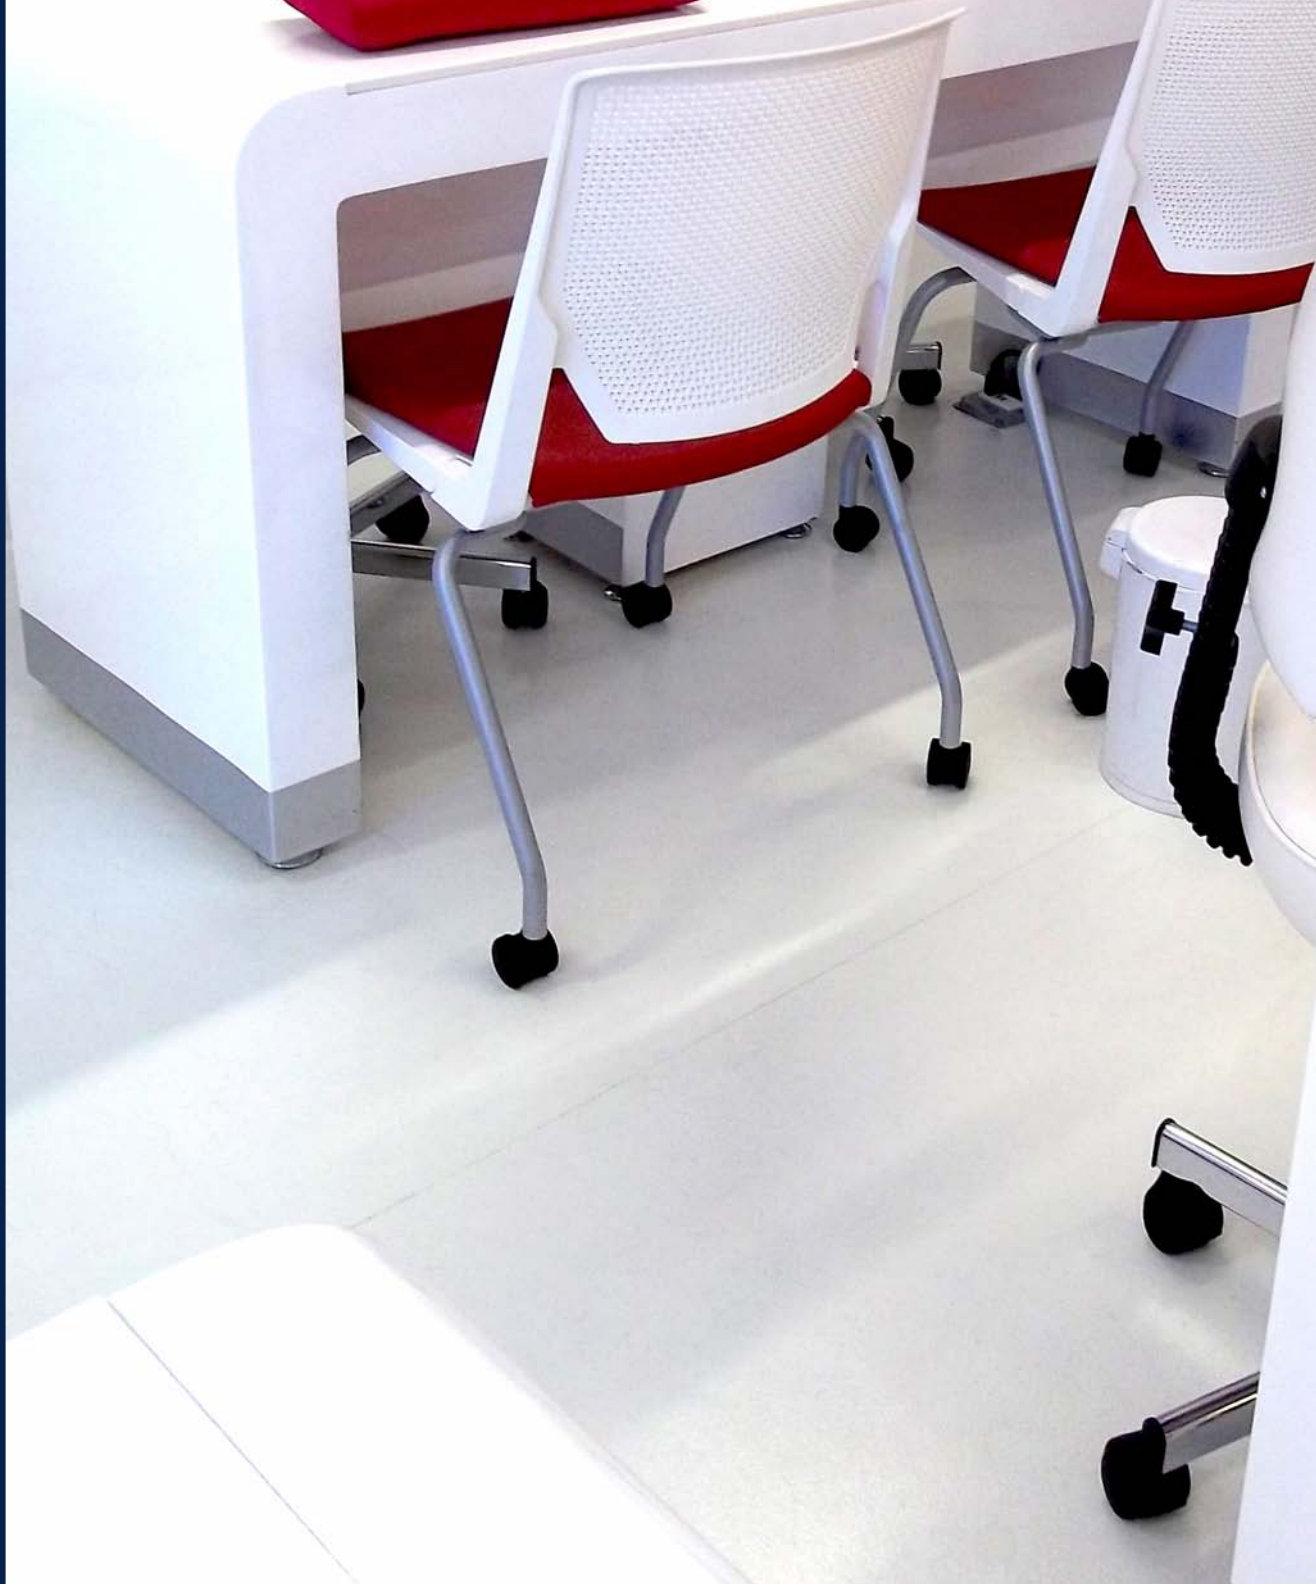

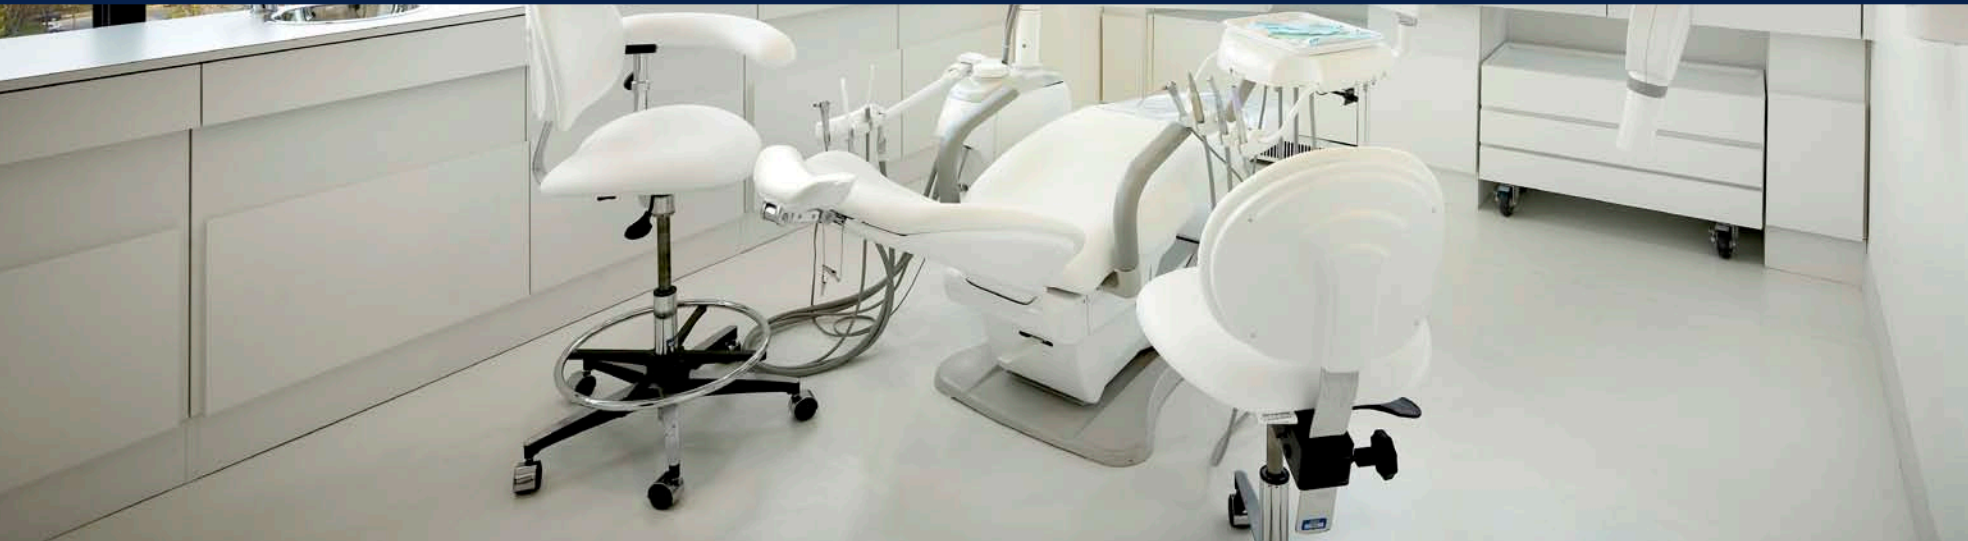

M660UV
Fire Hydrant

M662UV
Black Limo

M668UV
Loading Zone*

