
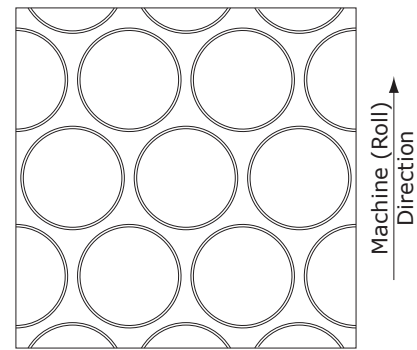


DESCRIPTION *(all sizes and weights are nominal)*

| | | | |
|---------------------|------------------|--------------------------|-----------------------------|
| Part Number: | Cxxx | | Color Numbers (xxx): |
| Thickness: | 0.100 in. | (2.5 mm) | C123 Black |
| Width: | 6 ft. | (1.8 m) | C124 Gray |
| Length: | 60 ft. | (18.3 m) | |
| Weight: | 0.8 lbs./sq. ft. | (3.8 kg/m ²) | |

STRUCTURE *(all measurements are nominal)*

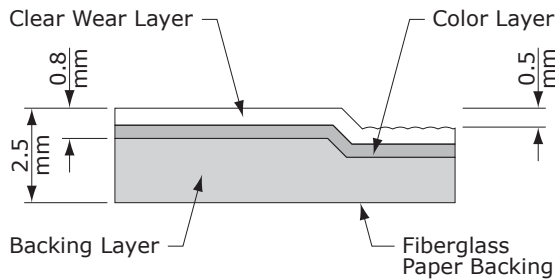

PROPERTIES

- ▶ Per ASTM F1303: Type I, Grade I, Class B, Commercial Use
- ▶ Features GreenMedic® (Antimicrobial Resistance) and GreenAir® (Low VOC) formulations
- ▶ FloorScore® Indoor Air Quality Certified; conforms to CA Specification 01350
- ▶ Meets FMVSS 302 (per CFR 49 §571.302)

TEST DATA *(refer to the last page for additional test information)*

| ASTM F1303, Sheet Vinyl Floor Covering with Backing | Result | |
|---|--|-----------|
| ASTM F137, Flexibility | Passes | |
| ASTM F925, Chemical Resistance | Passes | |
| | 5 min. | 24 hr. |
| White Vinegar (5% Acetic Acid) | No change | No change |
| Rubbing Alcohol (70% Isopropyl Alcohol Base) | No change | No change |
| White Mineral Oil (Medicinal Grade) | No change | No change |
| Sodium Hydroxide Solution (5% NaOH) | No change | No change |
| Hydrochloric Acid Solution (15% HCl) | No change | No change |
| Sulfuric Acid Solution (5% H ₂ SO ₄) | No change | No change |
| Household Ammonia Solution (5% NH ₄ OH) | No change | No change |
| Household Bleach (5.25% NaOCl) | No change | No change |
| Disinfectant-Phenol Type (5% Active Phenol) | No change | No change |
| Kerosene | No change | No change |
| Olive Oil | No change | No change |
| Unleaded Gasoline | No change | No change |
| ASTM F970, Static Load Recovery | Passes | |
| ASTM F1514, Stability to Heat | Passes | |
| ASTM F1515, Stability to Light | Passes | |
| ASTM F1914, Short-Term Indentation | Passes | |
| Additional Testing | Result | |
| ASTM D2047, Dry SCOF, James Machine, Floor Finish Applied | Neolite: 0.70 | |
| ASTM E648, Critical Radiant Flux | Class 1 (≥0.45 watts/cm ²) | |
| ASTM F510, Abrasion Resistance (1,000 cycles) | 0.08 g (0.26%) loss | |

⚠ WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov.