
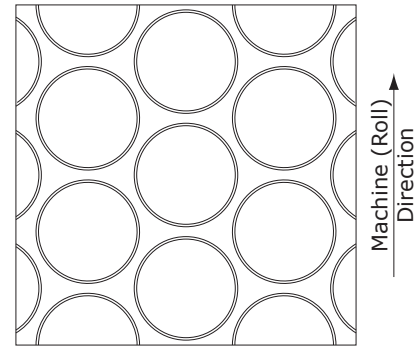


DESCRIPTION *(all sizes and weights are nominal)*

Part Number:	Cxxx C8xxx		Color Numbers (xxx):	150 Onyx 152 Sapphire 154 Sandstone 155 Jade* 157 Moonstone 158 Silicon* 159 Sodalite*
Thickness:	0.100 in.	(2.5 mm)		
Width:	6 ft. 8 ft.	(1.8 m) (2.4 m)		
Length:	60 ft.	(18.3 m)		
Weight:	0.8 lbs./sq. ft.	(3.9 kg/m ²)		

*Only available as 6 ft. wide

STRUCTURE *(all measurements are nominal)*

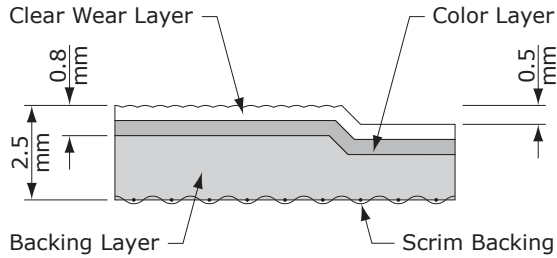

PROPERTIES

- ▶ Per ASTM F1303: Type I, Grade I, Class B, Commercial Use
- ▶ Features GreenMedic® (Antimicrobial Resistance) and GreenAir® (Low VOC) formulations
- ▶ FloorScore® Indoor Air Quality Certified; conforms to CA Specification 01350
- ▶ Meets FMVSS 302 (per CFR 49 §571.302)

TEST DATA *(refer to the last page for additional test information)*

ASTM F1303, Sheet Vinyl Floor Covering with Backing	Result	
ASTM F137, Flexibility	Passes	
ASTM F925, Chemical Resistance	Passes	
	5 min.	24 hr.
White Vinegar (5% Acetic Acid)	No change	No change
Rubbing Alcohol (70% Isopropyl Alcohol Base)	No change	No change
White Mineral Oil (Medicinal Grade)	No change	No change
Sodium Hydroxide Solution (5% NaOH)	No change	No change
Hydrochloric Acid Solution (15% HCl)	No change	No change
Sulfuric Acid Solution (5% H ₂ SO ₄)	No change	No change
Household Ammonia Solution (5% NH ₄ OH)	No change	No change
Household Bleach (5.25% NaOCl)	No change	No change
Disinfectant-Phenol Type (5% Active Phenol)	No change	No change
Kerosene	No change	No change
Olive Oil	No change	No change
Unleaded Gasoline	Slight change	Slight change
ASTM F970, Static Load Recovery	Passes	
ASTM F1514, Stability to Heat	Passes	
ASTM F1515, Stability to Light	Passes	
ASTM F1914, Short-Term Indentation	Passes	
Additional Testing	Result	
ASTM D2047, Dry SCOF, James Machine, Floor Finish Applied	Neolite: 0.88	
ASTM E648, Critical Radiant Flux	Class 1 (≥0.45 watts/cm ²)	
ASTM F510, Abrasion Resistance (1,000 cycles)	0.06 g (0.18%) loss	

⚠ WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov.