


**FEATURES** (data shown are nominal)

**Roll Width:** 6 ft. (1.8 m)  
**Roll Length:** 60 ft. (18.3 m)  
**Overall Thickness:** 0.080 in. (2.0 mm)  
**Wear Layer Thickness:** 0.031 in. (0.8 mm)  
**Wear Layer Thickness for 668 Loading Zone:** 0.018 in. (0.45 mm)  
**Weight:** 0.6 lbs./sq. ft., 210 lbs./roll

**PROPERTIES**

**GreenMedic®:** Antimicrobial resistance  
**GreenAir®:** Low VOC technologies  
**FloorScore®:** Indoor Air Quality (IAC) Certified;  
 Comforms to CA Specification 01350

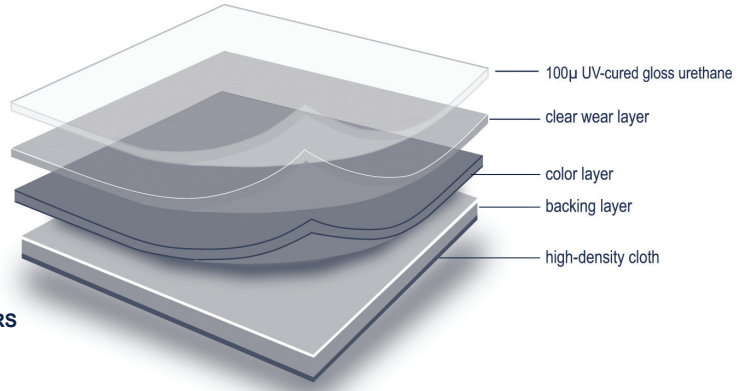

**LEEDv4 CONTRIBUTION BUILDING & CONSTRUCTION INTERIORS**

Environmental Product Declarations Option 1  
 Sourcing of Raw Materials Option 2  
 Low-Emitting Materials  
 20%-35% Post-Industrial Recycled Content

**Warranty periods vary by type of installation.**

*\*Due to the light color of #668 Loading Zone, more frequent maintenance procedures are necessary to ensure a long lasting installation. In addition, areas of prolonged UV exposure should be avoided to prevent unwanted discoloration of the flooring.*

**TEST DATA**

ADDITIONAL TESTING	RESULT
ASTM D2047, Dry SCOF, James Machine, Floor Finish Applied	Neolite: 0.57
ASTM D6962, Rolling Chair Test	No Change
ASTM E648, Critical Radiant Flux	Class 1 (≥ 0.45 watts/cm <sup>2</sup> )
ASTM F510, Abrasion Resistance	0.14 g (0.56%) Loss

NOTE: Printed data may not be the most current. Refer to LONSEAL.COM for the most current technical information.

Celebrating over 46 years of durability and performance, **LONSEAL® FLOORING** offers a unique selection of resilient sheet vinyl in exterior and interior, embossed, smooth, sport and wood-grain surfaces. We provide finishes of exceptional beauty and utility which are as economical as they are exhilarating. Servicing a range of commercial applications including healthcare, education, fitness, corporate, retail and hospitality, Lonseal Flooring products are specifically chosen by architects and designers nationwide. In addition, we have our **LONSEAL® SPECIALTY** product line that have been designed to provide solutions that meet the demands of market-specific installations in the areas of aviation, marine, and specialty vehicles.

Lonseal® has the reputation for the highest quality sheet vinyl products. We are known to focus on essential attributes such as stain and slip-resistance, **GreenMedic®** anti-microbial formula that is exclusive to Lonseal, and having the lowest VOC properties of any vinyl flooring product in the market with our **GreenAir®** formulation.



Manufactured at a facility certified to:  
 JIS Q 9001:2004/JIS Q 9001:2000, the International Quality Assurance Standard  
 ISO 14001, Environmental Management Systems  
 Version: 01.12.18

LONSEAL, INC.  
 928 E. 238th Street, Carson, CA 90745 USA  
 800.832.7111 toll free | 310.830.7111 ph  
 www.lonseal.com